

# Classic touch



Product Data Sheets 2006

WOOD



## TECHNICAL INFORMATION

	Classic Touch	Epoque	Classic Touch	Heritage
<b>Thickness (mm)</b>	14		10	
<b>Width (mm)</b>	117/162/190/200		68	
<b>Length (mm)</b>	2000-2520/1240		476/600	
<b>Wearlayer thickness (mm)</b>	~ 3,6		~ 4,00	
<b>Weight (kg/m<sup>2</sup>)</b>	8,0		~ 7,0	
<b>Taber Abraser/Lacquer's wear resistance*</b>				
ENV 13696/SIS 923509				
abrasion penetration Proteco Lacq.(revs)	>=7000		>=7000	
abrasion penetration Proteco Nat.(revs)	>=6500			
abrasive wear (mg/100revs)	~ 3,5		~ 3,5	

### Reduction of sound weighted index "footfall" to the room below.

NF EN ISO 140-8/ Acc to NF EN ISO 717-2, $\Delta L_w$ in dB with 3 mm Cellfoam	17	
--	----	--

### Formaldehyde emission

EN 13986	E1	E1
----------	----	----

### Fire safety class

NT Fire 007	Class G**	Class G**
-------------	-----------	-----------



### Thermal insulation value

(R <sub>T</sub> m <sup>2</sup> K/W)		
board only	0,101	
with rag felt	0,121	
with 3mm Cellfoam	0,191	
Glue down		0,067

### Installation\*\*\*


Floating/Glue down      Glue down

### Underfloor heating compatible\*\*\*\*

Low temperature (max temparture 27°C), waterborne system or self-regulating electrical system.

- \* Method not applicable for brushed products due to the structured surface
- \*\* Number of approval 4514/86. Floorcovering of class G on noncombustible material or on combustible material with a density not less than 510 kg/m<sup>3</sup>.
- \*\*\* Contact your flooring supplier for further infomation
- \*\*\*\* Not suitable for the wood species beech and maple

### Wood floors, Brinell Hardness (BHN), EN1534

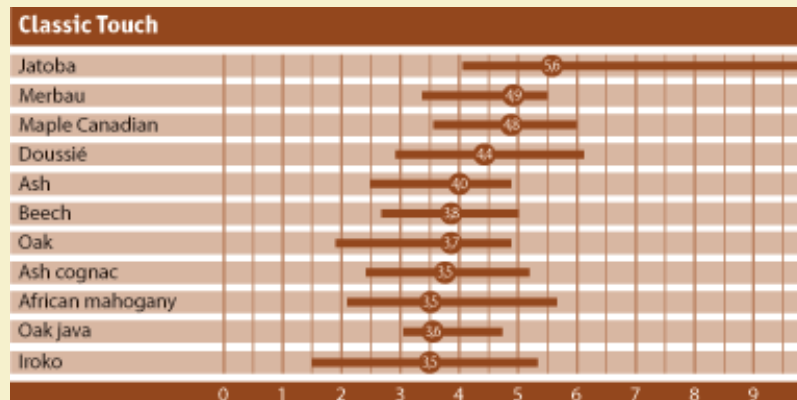

Classic Touch	Epoque	lacquer T-lock	natura T-lock
<b>14mm 2-strip</b>			
eu oak nature		o	o
eu oak rustical brushed		x	x
merbau		o	o
african mahogany		o	o
<b>14mm 1-strip 190mm</b>			
am oak		o	
am oak antique		o	
am oak antique brushed			o
<b>14mm 1-strip 162mm</b>			
eu oak		o	
am oak		o	o
am oak antique brushed			o
am oak antique white brushed			o
am oak java brushed			o
eu oak rustical brushed			o
ash white			o
ash robust white			x
ash cognac		o	
ash cognac brushed			o
maple robust		x	
maple		o	o
steamed beech		o	o
merbau		o	o
african mahogany		o	o
jatoba		o	o
doussié africana		x	
doussié bipendensis		x	
<b>14 mm 1-strip 117 mm</b>			
eu oak		o	o
eu oak white			o
eu oak brushed		o	
eu oak rustical brushed		x	x
eu oak java brushed			o
ash merbau		o	
ash merbau brushed			o
maple european		o	
steamed beech		o	
merbau		o	o
african mahogany		o	
jatoba		o	
doussié bipendensis		o	
doussié africana		o	

Classic Touch	Heritage	lacquer T/G
<b>10 mm 1-strip 476/600 mm</b>		
oak superior		o
oak classic		o
maple canadian superior		o
maple canadian classic		o
doussié Africana superior		o
doussié Africana classic		o
iroko superior		o
iroko classic		o
merbau supreior		o
merbau classic		o
steamed beech superior		o
steamed beech classic		o

- o = Class 0 Standard range with stock
- x = Class 2 Falling products, Subject to availability

