

UNIMINI KERRA

PRODUCT INFORMATION

Name	Unimini Kerra	Description	Park
Product #	8046725	Product # (old)	
Anchoring	Sunken Foundation	Colour	Bark brown post/light green panel
Age	2-5	Price	Contact HAGS
Assembly time	17 hours	Weight	283 kg
Volume	1.94 m ³	Safety Area	27 m ²
Length	3800 mm	Safety Area Length	7400 mm
Width	2300 mm	Safety Area Width	5200 mm
Height	2620 mm	Fall height	1300 mm

IMAGES







+2,62

+1,20


+0,96

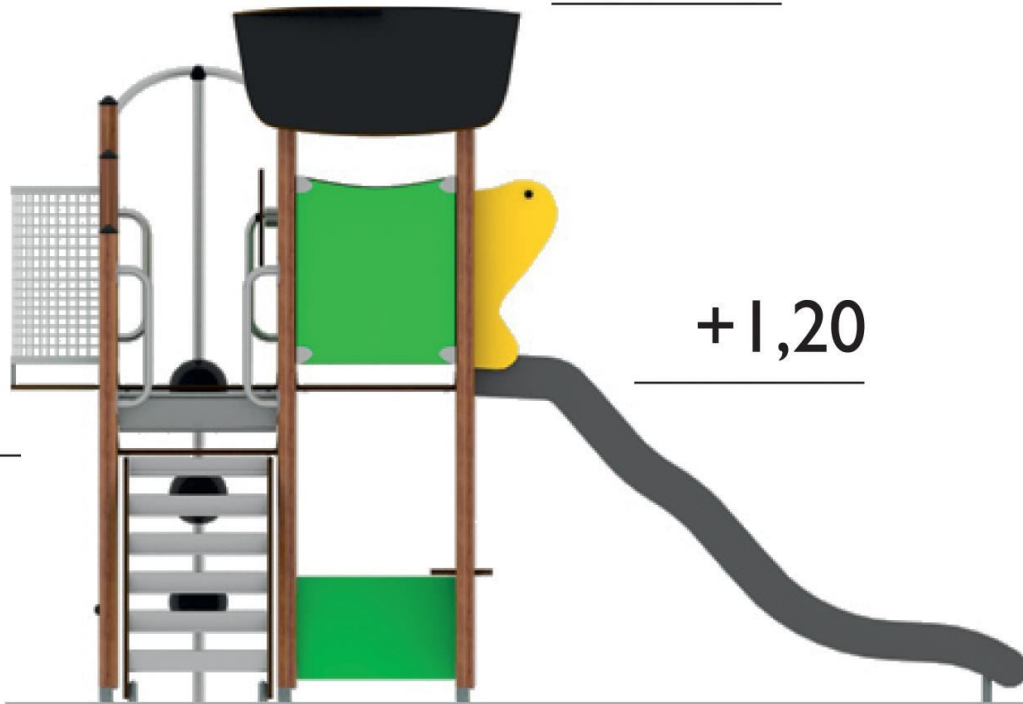


OM

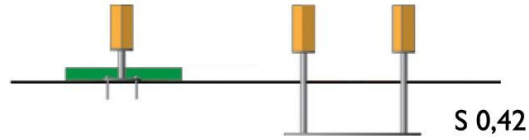

S 0,42

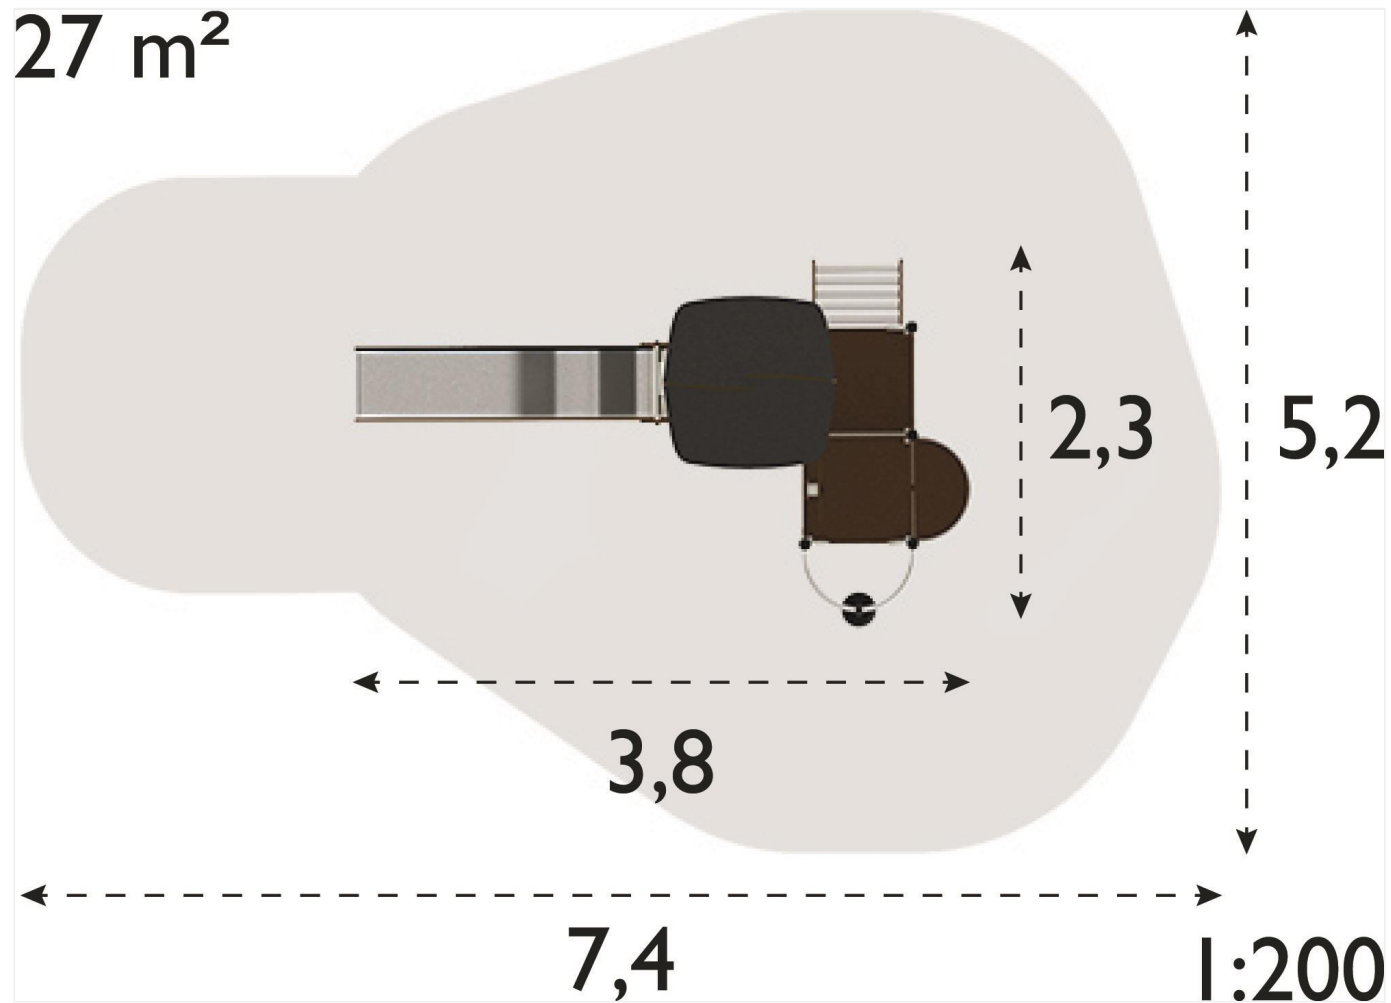

PLAY FUNCTIONS



Clock



Ball Post

MODULAR DIMENSIONS: 1.00 m. MATERIALS: Manufactured from galvanised and powder-lacquered tubular steel. Microcell-polyurethane foam balls.

UM Balcony



Module size: 0.67 m. Materials: Frame of tubular steel with steel mesh infill. All of the steel components are electro-galvanised, primed and powder-lacquered. Deck of plywood finished with a phenolic film coating.



UM Shop

MATERIALS: Phenol film-coated plywood or HPL. Galvanised and powder-lacquered steel plate frame.



UM Ships Wheel

Size: 0.4 m diameter. Materials: Wheel in HPL. Frame of electro-galvanised, powder-lacquered steel. Braked-action rotation.



UM HPL Slide

Width: 0.45 m. Module size: 0.67 m. Materials: Sides of 18 mm HPL. Chute of 1.0 mm pattern-rolled stainless steel. A 3 mm sheet of oil-hardened hardboard under the full length of the chute helps to reduce noise.



UM Stairs

Width: 0.45 m. Module size: 0.67 m. Materials: Aluminium steps. HPL sides.

MATERIAL

Material	kg	%
Zink (electro-galvanised)	0.0409	0.01
Polyethylene (PE)	0.847	0.22
Polyamide (PA)	0.9037	0.24
Zink (hot-galvanised)	1.3906	0.36
Fibreboard	3.6723	0.96
Aluminium	4.64	1.21
Polyurethane foam/flex	8.4	2.19
Stainless steel	10.1304	2.64
Plywood	26.398	6.89
Pine	54.9006	14.33
Steel	119.821	31.27
HPL	151.985	39.67
Polypropylene (PP)	0.002	0
	383.1 kg	100%

HAGS Aneby AB - A Play Power Inc Company - hags@hags.com