

Description

Heterogeneous indoor floorcovering, 2mm thick.

1: SUPERIOR PERFORMANCE AND LONGTERM SAVINGS

Omnisports is backed with a single surface embossing combined with TopClean XP™ surface treatment

2: EXTREME PROTECTION AND DURABILITY

Vinyl wear layer

3: DYNAMIC COLOURS AND REALISTIC DECORS


High definition printing for a realistic wood surface appearance and built-in unis for higher color intensity

4: OUTSTANDING DIMENSIONAL STABILITY < 0.10%:

Extremely tough single glass veil reinforcement

5: HIGH PERFORMANCE AND DURABILITY:

Homogeneous calendared sheet made from up to 60% recycled vinyl.

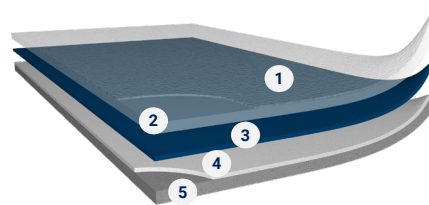

| PROPERTIES | STANDARDS | OMNISPORTS COMPACT |
|------------|-----------|--------------------|
|------------|-----------|--------------------|

DECLARATION OF PERFORMANCE

0120-003-DoP-2013-04

CLASSIFICATION

| Type of floor covering | EN 14041 | Heterogeneous indoor floorcoverings |
|------------------------|----------|-------------------------------------|
|------------------------|----------|-------------------------------------|

TECHNICAL CHARACTERISTICS

| Property | Standard | Value |
|-----------------|--------------------|----------------------|
| Total thickness | ISO 24346 (EN 428) | 2mm |
| Total weight | ISO 23997 (EN 430) | 3045g/m ² |
| Width | ISO 24341 (EN 426) | 2m |
| Length | ISO 24341 (EN 426) | 231m |


REQUIREMENTS FOR SAFE USE

| Property | Standard | Value |
|----------------------|-------------|-----------|
| Friction | EN 13036-4 | 80 to 110 |
| Shock absorption | EN 14808 | - |
| Vertical deformation | EN 14809 | - |
| Specular gloss | EN ISO 2813 | ≤30 |

TECHNICAL PERFORMANCES

| Property | Standard | Value |
|------------------------------|-----------------------------------|---|
| Vertical ball behaviour | EN 12235 | - |
| Reaction to fire | EN 13501-1 | Bfl-s1* |
| Resistance to wear | EN ISO 5470-1 | - |
| Resistance to indentation | Average measured value EN 1516 | ≤0.05mm - |
| Resistance to a rolling load | EN 1569 | - |
| In room noise | NFS-074 | - |
| Thermal resistance | EN ISO 14456 | Approx. 0.02 m ² K/W Compatible with underfloor heating |

Colors available

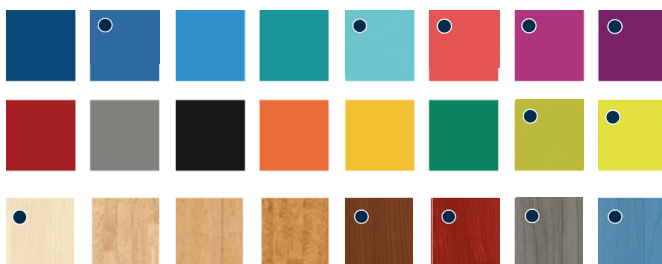

● Available ON DEMAND, minimum quantity: 700 m² (+/- 10%).



* glued installation on concrete

Installation and maintenance guides available on request

Technical data in force as from the date of publication (06/2021).

The values above correspond to laboratory test (no in situ test), and are subject to modifications for the benefit of further improvement.

For more detailed technical information, please contact Tarkett Sports.

Colors of the products shown in the photos or samples are indicative only. There may be differences in color, gloss and embossing structure between the products sold and photos or samples.