

**SPORTEC® fusion classic** consists of a technically advanced elastic layer made from SPORTEC® standard material and a tried and tested SPORTEC® UNI classic floor covering. This combination prevents damage to joints and other injuries and is therefore particularly recommended for indoor sports facilities in schools, leisure centres and multi-purpose buildings. The elastic layer and the top layer are delivered as pre-fabricated double-layer rolls. Less time is required during installation, because only the adhesion of the floor covering must be performed on the substrate.

## Material

Material:


Top layer: Fine-grain EPDM colour granules bonded with PU-elastomer.

Elastic layer: Fine-grain recycled tyre rubber granules bonded with PU-elastomer.

## Product design

Colour(s): red, blue  
(other colours on request)  
low colour differences are conditional of material

Colour(s):

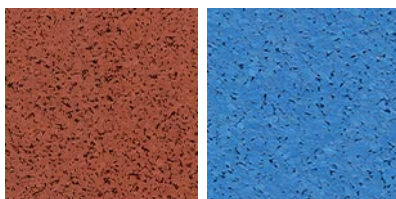

UNI classic red, UNI classic blue

Surface: SPORTEC® UNI classic (fine-grain)

Lower side: SPORTEC® standard

Note: The elastic layer and the top layer are delivered as pre-fabricated double-layer rolls.

The product data sheet is not subject to any change service! All information is without guarantee.

Latest version of this document available on [www.kraiburg-relastec.com/sportec](http://www.kraiburg-relastec.com/sportec)

page 1 of 3

**Dimensions / Tolerances / Weight**

Thickness(es):	8 mm (± 0.6 mm)
Roll width:	1,250 mm (± 1.5 %)
Roll length:	15 m ( ± 1.5 %)
Area weight:	approx. 8.3 kg/m <sup>2</sup>

**Product Testing**

Fire resistance:	C <sub>fl</sub> -s1 (B1) (DIN EN 13501-1)
Tensile strength:	min. 0.7 N/mm <sup>2</sup> (EN 12230)
Elongation at break:	min. 60 % (EN 12230)
Hardness:	60 ± 5 Shore A (DIN 53505)
Temperature range:	-30°C to 80°C (internal tested)
Force reduction:	approx. 20.9% (internal tested)
Ball rebound:	100 % (internal tested)
Abrasion:	max. 450 mm <sup>3</sup> (DIN 53516)
Coefficient of friction:	> 0.30 μ (DS) (EN 13893)
Anti-slip property:	R 9 (DIN 51130) R 11 (sealed with RZ turbo protect zero + RZ grip)
VOC emission rating:	



### Installation

Installation has to be done in accordance to the Installation Recommendation of **SPORTEC® fusion classic**. The latest version of the Installation Recommendation can be downloaded at the website of KRAIBURG Relastec GmbH & Co. KG.

### Sealing

It is recommended to seal the floor covering **SPORTEC® fusion classic** with 2 components PU sealer system “RZ turbo protect zero” which is available directly from our company.

Small damages at the sealed surface can be tread afterword by using a „RZ Refresher Set“ to retain the visual effect.